

PHONOPreAmp iVinyl

Digitise records and tapes with 24bit/96KHz



The sound-rich duo for perfect audio recordings

No matter if an old favourite song on LP or a tape, the PhonoPreAmp iVinyl can eternalize all your LP, single or cassette recordings with ease and speed via the USB interface. All with no sound card!

High-quality PhonoPreAmp for perfect recordings

Record your old audio recordings to your PC without quality loss. The PhonoPreAmp is equipped with an input for your turntable (with moving magnet cartridge) and with a port for tape decks or other audio sources. Adjustable levels, shielded housing, not to mention carefully selected components and a first-class signal-to-noise ratio together guarantee the perfect recording. The PhonoPreAmp requires no drivers, no sound card and no power supply. Connect it to your computer's USB port and start recording.

Easy-to-use restoration software

Do your records pop and crackle? Static noise on your tapes? TERRATEC SoundRescue is a powerful yet easy to use program that will get rid of those annoying noises for you in no time at all. It operates in realtime, and with just a mouse click. Now there is nothing standing in the way of listening pleasure in CD quality.

sound
punos



PHONOPreAmp iVinyl

Technical Details

Features

- Ideal for moving magnet (MM) cartridges and high-output moving coil (MC) systems or audio devices with line level (e.g. tape decks)
- Not suited for standard MC systems
- USB power supplied
- Supported sample rates: 32kHz / 44.1 kHz / 48 kHz / 96 kHz
- Input sensitivity 6mV (min) / 1 kHz (max)
- Input capacity adjustable in three stages (100 pF, 250 pF and 430 pF)
- Filter function with high-precision RIAA equalization (20 Hz-20 kHz / ± 0.3 dB)
- Harmonic distortion < 0.007 % (5 mV)
- Signal-to-noise ratio > 86 dB (A)
- EMC-conforming shielded housing
- Signal and peak LED

Software


- Algorithmix Sound Rescue

System Requirements

- 1 available USB 2.0 or USB 3.0 interface
- 10 MB of temporary free hard disk space for every 1 minute of audio to be recorded
- Moving Magnet (MM) or Moving Coil (MC) cartridge with high output level (min 2-3mV)
- 800 MHz Intel or AMD CPU or comparable Centrino certified Notebook
- Windows XP SP3, Windows Vista SP2, Windows 7 SP1

Package Contents

- PhonoPreAmp iVinyl
- Cinch/Cinch cable
- USB connecting cable
- Software CD
- Quick Setup Guide
- Service card

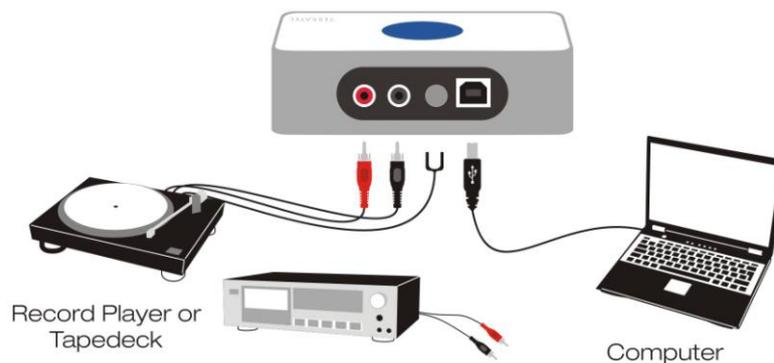

Art.No.: 10382
EAN Code: 4017273103822
Warranty: 24 Months

sound

